


SECTION 10400

Looking NE (+/-25m)

REFERENCE LINE

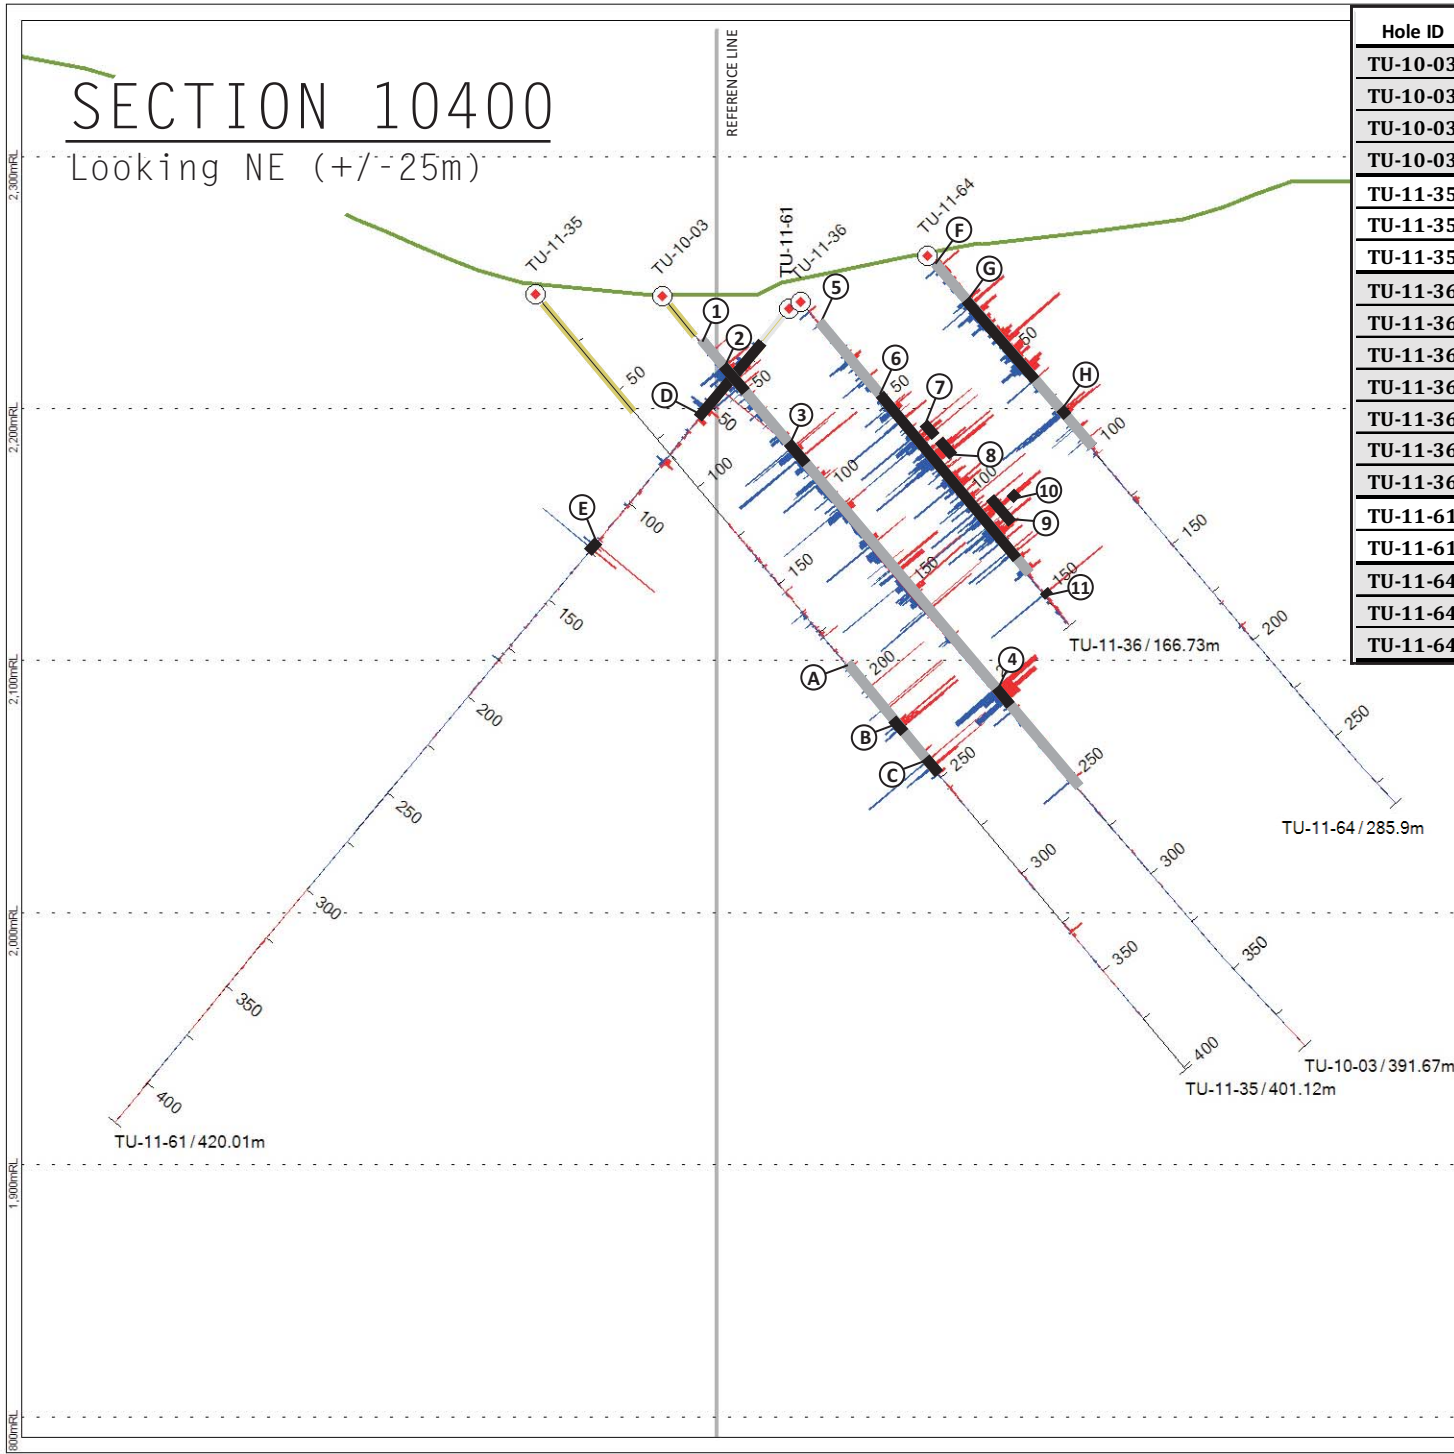

Hole ID	Interval	Interval (m)	Au (g/t)	Ag (g/t)	AuEq (g/t)
TU-10-03	1	232.30	0.36	34.0	0.9
TU-10-03	2	10.86	0.61	69.0	1.7
TU-10-03	3	10.03	0.80	121.0	2.7
TU-10-03	4	7.04	2.70	226.0	6.1
TU-11-35	A	56.88	0.45	13.6	0.7
TU-11-35	B	3.30	3.36	47.6	4.3
TU-11-35	C	3.64	2.01	92.6	3.9
TU-11-36	5	129.25	0.69	53.7	1.8
TU-11-36	6	85.97	0.95	71.2	2.4
TU-11-36	7	3.81	2.52	194.2	6.4
TU-11-36	8	4.70	2.83	187.9	6.6
TU-11-36	9	10.20	1.93	135.2	4.6
TU-11-36	10	1.53	5.92	454.4	15.0
TU-11-36	11	0.44	5.68	447.0	14.6
TU-11-61	D	34.76	0.27	18.8	0.6
TU-11-61	E	3.15	0.89	67.9	2.3
TU-11-64	F	100.32	0.52	36.2	1.2
TU-11-64	G	38.93	0.91	49.0	1.9
TU-11-64	H	2.08	1.97	357.6	9.1

Gold Equivalent (AuEq) were calculated using silver to gold ratios of 50 to 1.

Overburden

Histograms of assay data

Gold : bars cut at 5 g/t Au

Silver : bars cut at 250g/t Ag

0 100 meters